


# CLEAN-EZE™ 2

*Moving Ahead  
With Technology*

## 100% Pneumatic, Closed-Loop, Automatic Screen Cleaning System

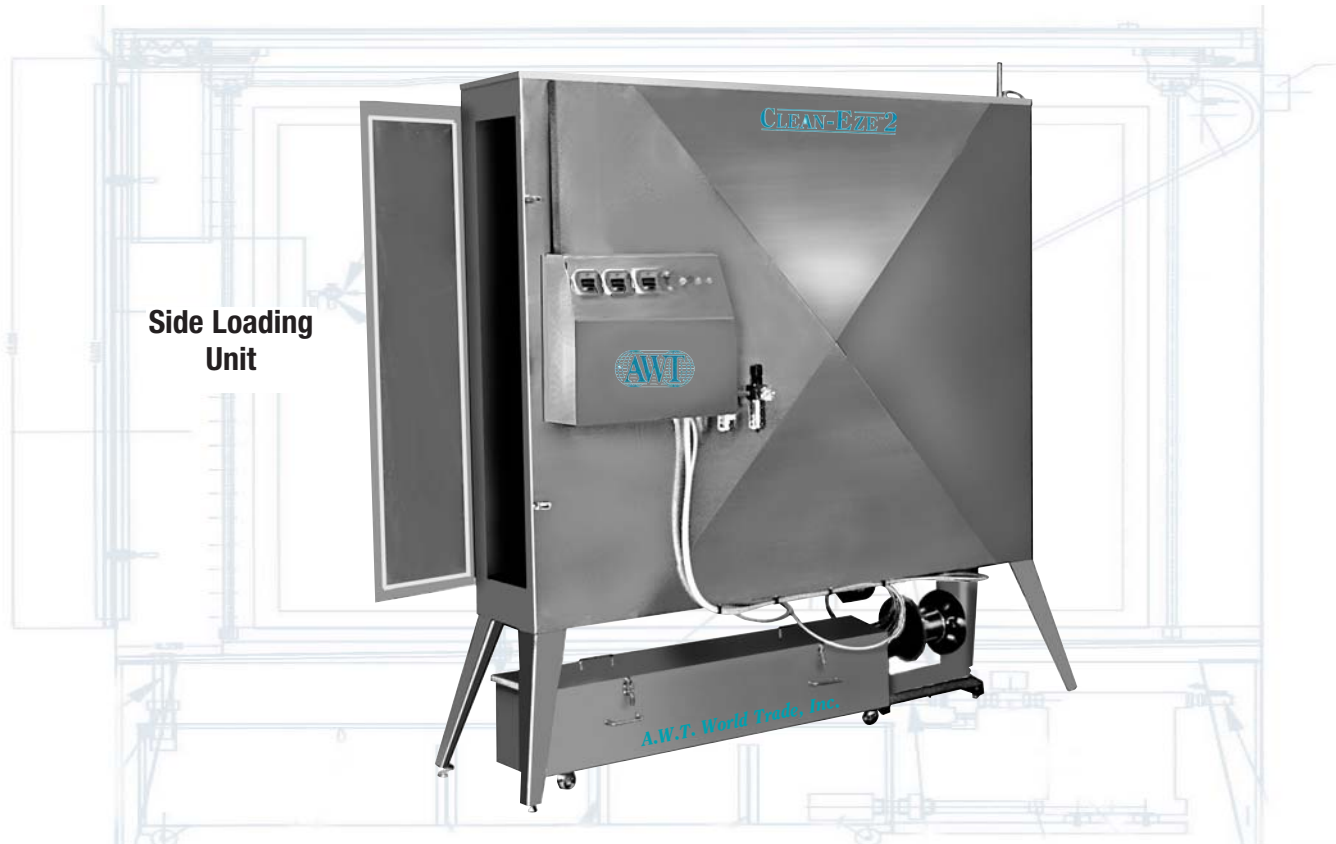

Side Loading  
Unit

### ADVANTAGES

- Automatically cleans and dries screens and parts using a closed-loop re-circulating system to remove stubborn inks
- Turbo jet nozzles, with speed control, move back and forth cleaning both sides of screen at once
- Fully automatic cycling from chemical to air drying
- Rust-free, stainless-steel construction and removable, reusable filters
- Fully pneumatic operation; automatic shut-off
- Side-loading unit and side-opening doors with automatic cut-off safety feature
- Exhaust port provision on top

The Clean-Eze™ 2 is 100% air-operated, making it safe, convenient and affordable to use. While using the Clean-Eze, operators are free to perform other tasks while the the unit automatically cleans and dries your screens, reducing labor costs. Disposal costs are also reduced as solvents recycle through the closed-loop system, limiting chemical and solvent consumption. The Clean-Eze was especially designed for use with biodegradable chemical solvents such as A.W.T.'s Safe-T-Wash™ Low-Odor Screen Wash (see other side).

Reciprocating pressure nozzles move slowly and evenly in the sealed, stainless-steel chamber to ensure the screen wash cleans both sides of the screen simultaneously. Set the unit to spray as many times as necessary to thoroughly clean stubborn ink from hard-to-reach corners and mesh openings. Set the air drying cycle and switch on for fully automatic cycling.

Manufactured by



**A.W.T. World Trade, Inc.**  
A Division of The A.W.T. World Trade Group

4321 N. Knox Avenue • Chicago, IL 60641 USA

773.777.7100 • Fax: 773.777.0909

sales@awt-gpi.com • www.awt-gpi.com

# CLEAN-EZE™ 2 AUTOMATIC SCREEN WASHERS

*High Quality, Industrial Grade Stainless Steel - Built to Last*

## Standard Features

- Fully pneumatic operation
- All stainless-steel construction
- Side doors with automatic cut-off
- Full automatic cycle from chemical to air cleaning system
- Closed loop re-circulating system
- Speed control for spray nozzle movement
- Stainless-steel filters
- Side-loading unit
- Inside safety doors
- Cleans both sides at once
- Automatic shut-off
- Exhaust port provision

CATALOG NO.	MAXIMUM O.D. FRAME SIZE*	MINIMUM AIR REQ.	RECYCLE TANK SIZE
CE-4040	40 x 40" (102 x 102 cm)	100 psi	20 gallon
CE-5870	58 x 70" (147 x 178 cm)	100 psi	40 gallon
CE-5896	58 x 96" (147 x 243 cm)	100 psi	40 gallon

\*Other sizes available

## Options & Accessories

CAT. NO.	DESCRIPTION
CE-SOL	Solvent Use Upgrade
CE-SPLC	Small Parts Loading Cart
CE-MPLC	Medium Parts Loading Cart
CE-OCB	Air-operated Open/Close Exhaust Baffle
CE-SST40	Stainless-steel Chemistry Recycling Tray for 40 x 40" Unit
CE-SST70	Stainless-steel Chemistry Recycling Tray for 58 x 70" Unit
CE-SST96	Stainless-steel Chemistry Recycling Tray for 58 x 96" Unit
CE-10MIC	Permanent Metal Replacement Tank Filter
CE-1MICC	Permanent Metal Replacement Pump Filter
CE-4040DP	Drip Pan for under CE-4040 Unit, Stainless-steel
CE-5870DP	Drip Pan for under CE-5870 Unit, Stainless-steel
CE-5896DP	Drip Pan for under CE-5896 Unit, Stainless-steel

## OTHER A.W.T. PRODUCTS

### A.W.T. SAFE-T-WASH™

#### Low-Odor Biodegradable Screen Wash

Safe-T-Wash™ is a special blend of cleaning solutions that meets standards for safe and effective cleaning of screen printing inks\*.

Safe-T-Wash has a low VOC rating and meets or exceeds most guidelines. This screen cleaning solution dissolves most ink systems efficiently with a minimum of time and effort.



CATALOG NO.	DESCRIPTION
STW-L01Q	1-Quart Container
STW-L01G	1-Gal. Container
STW-L05G	5-Gal. Container
STW-L055G	55-Gal. Container
STW-L050Z	2-oz. Trial Size

\* Note: Screen wash chemicals do not necessarily remove all types of inks. Some inks may be difficult to remove. Always test the ink to be removed from a screen. A.W.T. will test its' screen wash on your inks. Please send samples to be tested.

### KLEEN-SCREEN™

#### Automatic Closed Loop Screen Cleaning & Filtering System

The Kleen-Screen™ Automatic High-Pressure Emulsion Removing System revolutionizes the screen reclaiming process by automating both solvent application and high-pressure rinsing within a single enclosed stainless-steel unit.



**For an A.W.T. Dealer near you, contact:**



Manufactured by

**A.W.T. World Trade, Inc.**  
A Division of The A.W.T. World Trade Group

4321 N. Knox Avenue • Chicago, IL 60641 USA

773.777.7100 • Fax: 773.777.0909

sales@awt-gpi.com • www.awt-gpi.com