

KLEEN-VIEW™

*Moving Ahead
With Technology*

AUTOMATIC

Closed Loop Screen Cleaning & Filtering System



ADVANTAGES

- Fully enclosed system
- 100% air operated and safe to use
- Stainless steel, heavy-duty construction for rust-free life
- Translucent fiberglass back panel
- Double-sided closed-loop chemistry sprayer with variable speed controls
- Use with biodegradable chemistry, such as A.W.T.'s Safe-T-Wash™
- Exhaust outlet provided
- Closed-loop recirculating system
- Fully filtered with reusable, stainless-steel filters

The Kleen-View™ Automatic is a stainless steel, automatic, fully-enclosed 100% air-operated system that safely cleans screens, recovering ink residue for disposal.

The Kleen-View combines a washout stand, a shelf to hold supplies, and a screen washing system in one versatile unit. Stainless-steel, removable permanent filters can be cleaned easily and eliminate the need for costly replacement filters.

The closed-loop, recycling system provides fully-adjustable chemical flow. Wide, tempered glass front doors provide easy access and safe monitoring of the screen washing process.



A.W.T. World Trade, Inc.
A Division of The A.W.T. World Trade Group

4321 N. Knox Avenue • Chicago, IL 60641 USA

773.777.7100 • Fax: 773.777.0909

sales@awt-gpi.com • www.awt-gpi.com

THE KLEEN-VIEW™ AUTOMATIC SCREEN WASHING SYSTEM

Thoroughly cleans screens using biodegradable chemistry

Standard Features

Design & Construction

- Fully pneumatic operation
- Cleans both sides of the screen at one time
- Automatic shut-off after cycle finishes
- Heavy-duty all stainless-steel, welded construction
- Stainless-steel, cleanable, permanent filters in recirculating tank
- Four-chambered, stainless steel, 20- or 40-gallon chemistry tank provides four-step filtering
- Thick, clear-view, tempered glass doors
- Automatic door safety sensor

Air Requirements

- 80-100 psi

Specifications

Model No.	Maximum Frame O.D.	Overall (L x W x H)
KV-58SSA*	36 x 48ý	58 x 20 x 40ý (1.55m x .51m x 1.02m)
KV-80SSA	52 x 70ý	80 x 20 x 56ý (2.03m x .51m x 1.42m)
KV-100SSA	72 x 96ý	100 x 24 x 80ý (2.54m x .61m x 2.03m)
KV-130SSA	72 x 130ý	130 x 24 x 80ý (3.30m x .61m x 2.03m)
KV-180SSA	72 x 180ý	180 x 24 x 80ý (4.57m x .61m x 2.03m)

*Model #KV-58SSA comes with a 20-gallon recirculating tank; all other models come with a 40-gallon tank.

Custom sizes available - call for details.

For an A.W.T. dealer near you, contact:



Options & Accessories

- Backlighting systems available for all sizes of Kleen-View Automatic units
- Liquid Flow Diverters
- Solvent Use Upgrade (cannot be used with lighting systems)

ADDITIONAL A.W.T. PRODUCTS

A.W.T. SAFE-T-WASH™ LOW-ODOR SCREEN WASH

Safe-T-Wash™ is a special blend of cleaning solutions that meet standards for safe and effective cleaning of all screen printing inks. Safe-T-Wash has a low VOC rating and meets or exceeds most guidelines. This screen cleaning solution dissolves most ink systems efficiently with a minimum of time and effort.




Model No.	Description
STW-L01G	1-gallon container
STW-L05G	5-gallon container
STW-L055G	55-gallon container
STW-L020Z	2 oz. trial size

KLEEN-SCREEN™ EMULSION REMOVING SYSTEM

- Fully automatic, electro/pneumatic operation
- Stainless-steel construction with rugged, steel stand
- Stainless-steel filters on recirculation tank
- Front-loading unit

Call 773.777.7100 for more information!

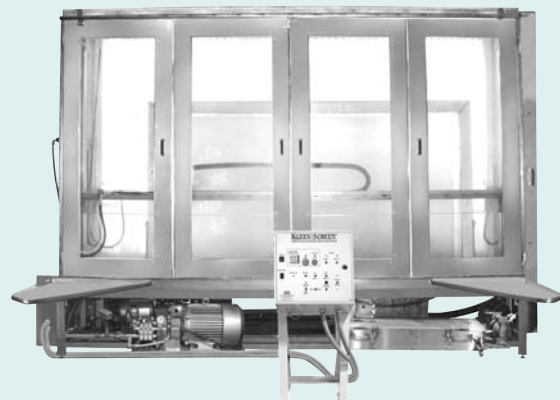

Manufactured by

A.W.T. World Trade, Inc.
A Division of The A.W.T. World Trade Group

4321 N. Knox Avenue • Chicago, IL 60641 USA

773.777.7100 • Fax: 773.777.0909

sales@awt-gpi.com • www.awt-gpi.com