


# PRO-LIGHT™ 2


*Moving Ahead  
With Technology*

## Direct Contact Vacuum Frame Exposure Units

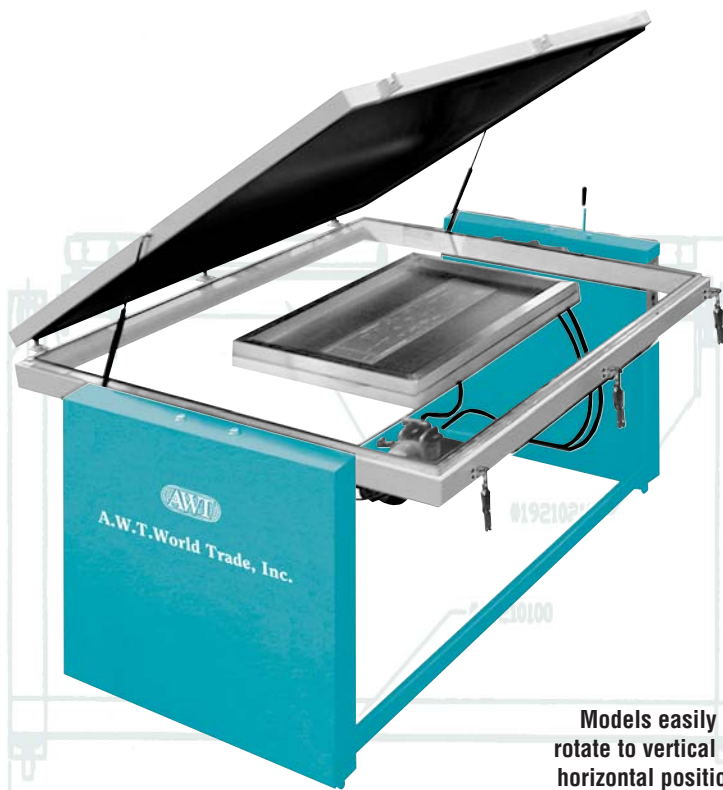

Models available with a maximum frame O.D. of 50 x 66" (127 x 168 cm) to 84 x 144" (213 x 366 cm)  
Custom sizes available (screen frame not included)

Models easily rotate to vertical or horizontal position (external light source available, but not included)

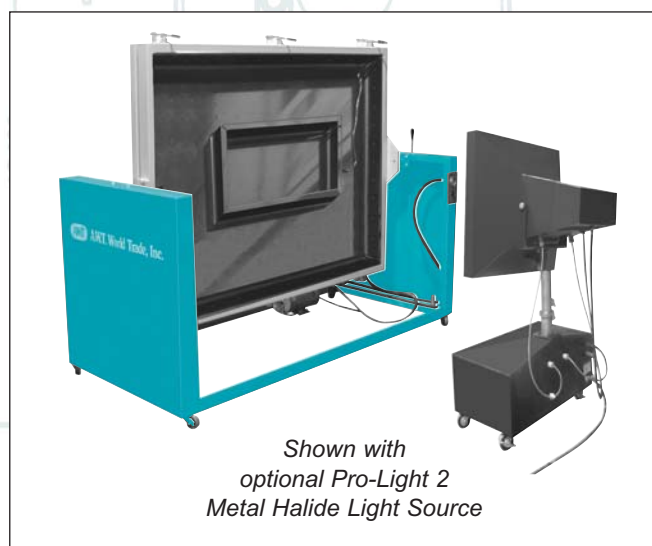

Shown with optional Pro-Light 2 Metal Halide Light Source

## ADVANTAGES

- Extra heavy duty construction for years of trouble-free use
- Top quality "live" rubber blanket is non-porous, UV-inhibited and returns to original shape after use
- Extra thick Photo Clear Select plate glass reduces reflection and flaws for excellent exposures
- Quiet vacuum motor quickly evacuates air for perfect contact between the positive and screen
- Counterbalanced design provides effortless raising of plate glass for frame insertion
- Frame is easily rotated to either a vertical or horizontal position for exposing from the side, overhead or below

Pro-Light™ 2 Vacuum Frame Exposure Units are extra heavy-duty, built for years of reliable screen production.

Any number or type of screen frames can be used from wood and aluminum to self-tensioning. The Pro-Light 2 can easily be locked in a 90° degree position for front exposing systems, a 180° face up position for overhead lighting systems or face down if lighted from below.

Top quality "live" rubber blanket maintains consistent contact between the mesh, positive and glass. Super counter balance tension system allows for easy positioning. Screens are ready to expose in minutes. The Pro-Light 2 comes complete with heavy-duty casters for easy movement.



Manufactured by

**A.W.T. World Trade, Inc.**  
A Division of The A.W.T. World Trade Group

4321 N. Knox Avenue • Chicago, IL 60641 USA

773.777.7100 • Fax: 773.777.0909

sales@awt-gpi.com • www.awt-gpi.com

